


LIGHT TANDEM ROLLER

SRD04

SRK04




LIGHT ROLLER SERIES



World leading hydrostatic driving system guarantees stepless speed control to achieve outstanding compaction result



Pressure sprinkler with high quality pump , interval spray system Wind-protected nozzles are easily accessible

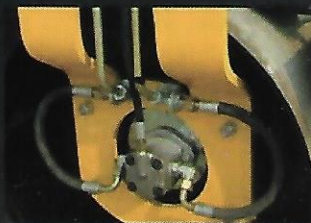

Sauer double vibrating hydraulic motor



Large operation platform ensure a pleasant workday




All function integrated in joystick for easy operation



Robust plastic water tank are fitted to prevent rust in sprinkling system

	SRD04	SRK04
Weight		
Working weight	4200kg	
Driving characteristic		
Speed	0-12km/h	
Turning radius	3000mm	
Gradeability	40%	
Drive	Double hydraulic drive	
Engine		
Model	YANMAR 4TNV88	
Type	Diesel engine, water-cooled, 4stroke, four cylinder	
Power	36kW/3000rpm	
Compaction		
Vibration	Hydraulic drive	
Static load	150/135.5N/cm	150N/cm(front)
Nominal amplitude	0.5MM	
Vibration frequency	60Hz	
Exciting force	40kN	
Tank capacities		
Fuel	70L	
water	200L	

SRD04 / SRK04

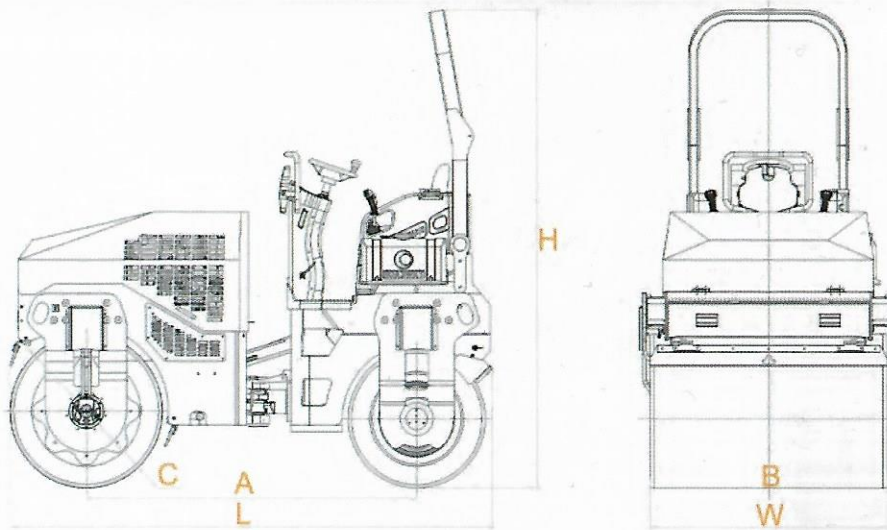

DIMENSION		SRD04	SRK04
Wheel base	A	1950mm	1950mm
Width of steel wheel	B	1400mm	1000mm
Diameter of steel wheel	C	900mm	620mm
Total length	L	2850mm	2850mm
Total width	W	1520mm	1520mm
Total height	H	2700mm	2700mm
Tire size	/	/	10.5/80-16
Tire diameter	/	/	790mm
Packing size		3000×1670×2200mm	3000×1670×2200mm

